

Geotechnical Laboratory PO Box 4339 1570 Bear Creek Road Oak Ridge TN 37830 (865) 482-6497

CERTIFICATE OF ANALYSIS

Stephen Trent Fluor Hanford, Inc. 825 Jadwin Avenue Richland, Washington 99352 January 5, 2005

This is the Certificate of Analysis for the following samples:

Shaw Project ID:

Shaw Project Number:

Client Sample Data Group:

Date Received by Lab:

Number of Samples:

Sample Type:

Eberline - Hanford 100846.36000000

H2843

November 23, 2004

One (1) Soil



EDMC

I. Introduction/Case Narrative

One soil sample was received by the Shaw Geotechnical Laboratory on November 23, 2004. The sample was submitted for determination of moisture content, bulk density, sieve analysis, permeability, specific gravity and calcium carbonate content. The sample number received was B19ND3.

Please see Appendix A, Sample Number Cross Reference List; Appendix B, Analysis Results; and Appendix C, Chain-of-Custody/Sample Receipt Records.

"I certify that this data package is in compliance with the SOW, both technically and for completeness, for other than the conditions detailed above. Release of the data contained in this hardcopy data package has been authorized by the Laboratory Manager or a designee, as verified by the following signature."

Reviewed and Approved:

Ralph Cole

Laboratory Manager, Geotechnical Services

JAN 10 200 S

00000001

Page 2 of 12 January 5, 2005 Stephen Trent Fluor Hanford, Inc. Shaw Project Name: Eberline Hanford Shaw Project No. 100846.36000000 SDG No. H2843

Shaw Geotechnical Laboratory Oak Ridge TN (865) 482-6497

II. Analytical Results/Methodology

REFERENCES: United States Army Corps of Engineers (USACE), Engineer Manual 1110-2-1906, Laboratory Soils Testing, appendix II, 1970; United States Environmental Protection Agency, SW846, Test Methods for Examining Solid Waste, Physical/Chemical Methods, 3rd ed., Nov 1986 (EPA SW-846). Annual Book of ASTM Standards, Section 4, Construction, Volume 04.08, Soil and Rock (I), and Volume 04.09, Soil and Rock (II), 2004. Shaw Environmental and infrastructure, Standard Operating Procedures.

Moisture Content of Soil and Rock	ASTM D 2216
Bulk Density of Soils	EM 1110-2-1906
Particle-size Analysis of Soils	ASTM D 422
Hydraulic Conductivity of Porous Materials Using	
a Flexible Wall Permeameter	ASTM D 5084
Specific Gravity of Soil	ASTM D 854
Calcium Carbonate Content	ASTM D 4373
Calolan Calonato Comentantini	

III. Quality Control

Quality control checks such as duplicates and spikes (QC samples), are not normally applicable to geotechnical testing. This is due largely to the inability of obtaining samples with known characteristics, the heterogenous nature of the samples, and quality control procedures built-in to the analytical method.

QC measures to ensure accuracy and precision of test results include the following:

- 100% verification of all numerical results raw data entries, transcriptions and calculations entered by lab technicians are checked, recalculated and verified. Most data calculations are performed by computer programs.
- Data validation through test reasonableness summaries of all test results for individual reports are reviewed to determine the overall reasonableness of data and to determine the presence of any data that may be considered outliers.
- Quality control procedures are built into most standardized geotechnical procedures. For example, liquid limit and plastic limit analyses call for re-analyses and specify acceptance criteria.
- Routine instrument calibration instruments, gauges and equipment used in testing are calibrated on a routine basis. All instrument calibration follows ASTM or manufacturer guidelines.

Page 3 of 12 January 5, 2005 Stephen Trent Fluor Hanford, Inc. Shaw Project Name: Eberline Hanford Shaw Project No. 100846.36000000 SDG No. H2843

Shaw Geotechnical Laboratory Oak Ridge TN (865) 482-6497

- Maintenance of all past calibration records calibration records and certification documents of all instruments, gauges and equipment are updated routinely and maintained in the Quality Control Coordinators Quality/Operations files.
- Certified and trained personnel all technicians are certified by the National Institute for Certification of Engineering Technicians (NICET) in geotechnical soil testing, and are trained in the application of standard laboratory procedures for geotechnical analyses as well as the quality assurance measures implemented by Shaw.
- Quantitative analyses frequently used in geotechnical/physical testing programs do not use
 QC tools common to wet chemistry or radiochemistry laboratories. Measures not employed
 in the analysis of samples reported in this report include: laboratory control samples (LCS),
 blanks, matrix spikes (MS), duplicate analyses, dilutions, digestions, correction factors,
 surrogate sample analyses, detection limit determinations, control charts, and/or tentatively
 identified compounds (TICs).

IV.Data Qualification

This soil sample contained a significant amount of oversize particles. Therefore, in addition to the normal specific gravity test (ASTM D 854) the specific gravity of the coarse fraction was determined by ASTM C 127. The value representing the overall sample specific gravity is given as "average bulk specific gravity". Other values are given that relate to materials used in civil engineering fields.

Appendix A Sample Cross-Reference List Page 4 of 12 January 5, 2005 Stephen Trent Fluor Hanford, Inc. Shaw Project Name: Eberline Hanford Shaw Project No. 100846.36000000 SDG No. H2843

Shaw Geotechnical Laboratory Oak Ridge TN (865) 482-6497

SAMPLE NUMBER CROSS-REFERENCE LIST

LAB SAMPLE NO.	CLIENT SAMPLE NO.	MATRIX
BC0475	B19ND3	Soil

Appendix B Sample Test Results Page 5 of 12 January 5, 2005 Stephen Trent Fluor Hanford, Inc. Shaw Project Name: Eberline Hanford Shaw Project No. 100846.36000000

SDG No. H2843

Shaw Geotechnical Laboratory Oak Ridge TN (865) 482-6497

MOISTURE CONTENT

PROJECT NAME

Eberline - Hanford

PROJECT NUMBER

100846.36000000

LAB SAMPLE NO.	CLIENT SAMPLE NO.	MOISTURE, % ASTM D 2216	MOISTURE, % SW846	SOLIDS, % SW846
BC0475	B19ND3	8.3	7.7	92.3
· · · · · · · · · · · · · · · · · · ·		<u> </u>		

ASTM D 2216 results are based on dry sample weight. SW846 results are based on wet sample weight. Solids content is determined by subtracting the SW846 moisture (%) from 100. Page 6 of 12 January 5, 2005 Stephen Trent Fluor Hanford, Inc. Shaw Project Name: Eberline Hanford Shaw Project No. 100846,36000000 SDG No. H2843

Shaw Geotechnical Laboratory Oak Ridge TN (865) 482-6497

BULK DENSITY/DRY DENSITY EM-1110-2-1906, APPENDIX II

PROJECT NAME:

PROJECT NUMBER:

Eberline - Hanford

100846.36000000

LAB SAMPLE NUMBER	CLIENT SAMPLE NUMBER	AVERAGE LENGTH, inches	AVERAGE DIAMETER, inches	WET WEIGHT, grams	MOISTURE CONTENT, %	BULK DENSITY, pcf	DRY DENSITY, pcf
BC0475	B19ND3	5.5995	3.8743	2235.44	12.3	129.0	114.9
l .———		<u> </u>			<u> </u>		
		<u> </u>					
		<u> </u>					
<u> </u>						<u>-</u> -	
						·	
		<u> </u>					
			.,,		<u> </u>	· 	
		<u></u>					<u> </u>

Moisture content calculated by ASTM D 2216 based on sample dry weight.

Bulk density is the weight of wet sample divided by the volume of the wet sample (as-received).

Dry density is the weight of the dry sample solids divided by the volume of the original sample.

Page 7 of 12 January 5, 2005 Stephen Trent Fluor Hanford, Inc. Shaw Project Name: Eberline Hanford Shaw Project No. 100846.36000000

Shaw Geotechnical Laboratory Oak Ridge TN (865) 482-6497

PARTICLE-SIZE DISTRIBUTION ASTM D 422

Project Name Eberline Hanford

Field Sample No. B19ND3

Project No.

SDG No. H2843

100846.36000000

Lab Sample No.

BC0475


Moisture Content = 12.3% based on dry sample weight

SIEVE ANALYSIS

	Sieve	Diameter	Percent
С	No	mm	Finer
0	3"	75.000	100.0%
Ä	1.5"	37.500	100.0%
R	0.75"	19.000	81.8%
S E	0.375"	9.500	61.2%
L.	#4	4.750	49.7%
	#10	2.000	42.3%

	Sieve	Diameter	Percent
	No.	mm	Finer
F	#20	0.850	39.3%
	#40	0.425	36.2%
N	#60	0.250	25.6%
Е	#100	0.149	17.7%
	#140	0.106	14.9%
	#200	0.075	12.7%

DISTRIBUTION CURVE

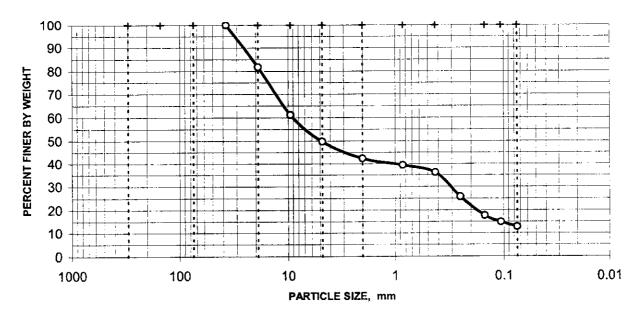

50.3% Gravel

37.0% Sand

12.7% Silt/Clay

Page 8 of 11 January 6, 2005 Stephen Trent Fluor Hanford, Inc.

Shaw Project Name: Eberline Hanford Shaw Project No. 100846.35000000

SDG No. 112842 H2843

Shaw Geotechnical Laboratory Oak Ridge TN (865) 482-6497


MU 1-4-06

HYDRAULIC CONDUCTIVITY / PERMEABILITY **ASTM D 5084**

CLIENT SAMPLE NO. **B19ND3** PROJECT NAME: Eberline Hanford BC0475 PROJECT NO. 100846.36000000 LAB SAMPLE NO.

	INITIAL FINAL]	
Specimen diameter, cm	6.35		
Specimen length, cm	5.28	Hydraulic gradient	6.7
Wet weight of specimen, g.	366.87	Min. consolidation stress, psi	2.0
Specimen cross-sect. area, cm^	2 31.71	Max. consolidation stress, ps	i 2.5
Water content, %	12.3	Total backpressure, psi	7.5
Wet unit weight, pcf	136.7		
Dry unit weight, pcf	121.7	Permeant Fluid Dea	aired DI Water
Degree of saturation, %	95.5		
Specific gravity of solids	2.60		

Coefficient of Permeability, cm/s 4.5E-05

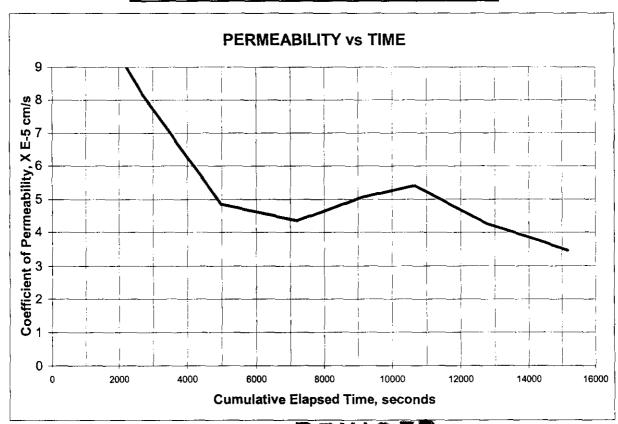



Page 9 of 12 January 5, 2005 Stephen Trent Fluor Hanford, Inc. Shaw Project Name: Eberline Hanford Shaw Project No. 100846.36000000 SDG No. H2843

Shaw Geotechnical Laboratory Oak Ridge TN (865) 482-6497

SPECIFIC GRAVITY ASTM C 127 ASTM D 854

PROJECT NAME:

Eberline Hanford

PROJECT NUMBER:

100846.36000000

LAB SAMPLE	CLIENT SAMPLE	SPEC. GRAV.	BULK SPEC.	AVERAGE BULK SPEC.	APPARENT SPECIFIC	AVERAGE APPARENT	BULK SPEC. GRAVITY	ABSORPTION
NUMBER	NUMBER	<4.75mm	GRAVITY	GRAVITY	GRAVITY	SPEC, GRAV.	SSD*	%
BC0475	B19ND3	2.7308	2.4912	2.6048	2.6657	2.6977	2.5566	2.63
		<u>.</u>						
<u></u>		<u> </u>			<u> </u>			ļ
		-						
 		 			<u> </u>			
<u> </u>		 						<u> </u>
f	 .	 			<u> </u>		<u> </u>	
							<u> </u>	
 		 	-					j
	···							
		1						
		1						

^{*} Saturated Surface Dry

Page 10 of 12 January 5, 2005 Stephen Trent Fluor Hanford, Inc. Shaw Project Name: Eberline Hanford Shaw Project No. 100846.36000000 SDG No. H2843

Shaw Geotechnical Laboratory Oak Ridge TN (865) 482-6497

Carbonate Content of Soils ASTM D 4373

PROJECT NAME:

Eberline Hanford

PROJECT NUMBER:

100846.36000000

LAB SAMPLE NO.	CLIENT SAMPLE NO.	CO3, %
BC0475	B19ND3	3
	·	

Appendix C Chain-of-Custody and Request-for-Analysis Records

	FLU	JOR Hanford Inc.		CHAIN OF CUSTODY/SAMPLE ANALYSIS REQUEST						F03-018-146	PAGE 1 OF 1
COLLECTOR		,,,	COMPANY CON	TACT		LEPHONE NO		PROJECT COORDINATOR		PRICE CODE 8	N DATA
Pope/Pfister/		7.1000	Steve Trent		3	73-5869		TRENT, SJ			IURNAROUND
SAMPLING			PROJECT DESIGNATION 216-Z-9 Trench Characterization Borehole - Soil					SAF NO. F03-018		AIR QUALITY	45 Days / 45 Days
ICE CHEST	71 -	al 377FT - 379.5FT	FIELD LOGBOO		orenole - Sol	COA			OF SHIPMENT		
ice chesi,	11V-	·63-0110	HNF-N-360 1	K 110.		119325ES1)	Federal E			
SHIPPED TO	(IV	0,010	OFFSITE PROPI	RTY/90	1. 1	·		BILL OF I	ADING/AIR BH1 N	20 .111	>
Shaw Group			201	Y71	144	50			Dei MI	(_144 <i>5</i> 0	フ
MATRIX*	POSSI	BLE SAMPLE HAZARDS/ REMARKS	PRESER	VATION	None	None					
A≖Air DL=Drum		TTIVE TIE TO: B19LK7									
Liquids DS=Drum			TYPE OF C	ONTAINER	Moisture Resistant Cor	Liner nt					
Solids L=Liquid					 	2					
O=Oil S=Soil	27	DG# H2843	NO. OF COM	(TAINER(S)		-	İ				
SE=Sediment T=Tissue		- G. 17 - 7	VOL	 UME	200g	1000g					
V=Vegitation W≠Water											
WI=Wipe X=Other	SPECI	AL HANDLING AND/OR STORAGE	SAMPLE A	NALYSIS	Moisture Content - D2216	SEE ITEM (1) IN	1				
						INSTRUCTIONS)				
	1										
SAMP	LE NO.	MATRIX*	SAMPLE DATE	SAMPLE TIME							
B19ND3	······································	SOIL	11-11-69	13:45							
			, , , ,	10: -							
	04	436				 	<u> </u>				
E	3C 04	1/5									
					-	 					
CHAIN OF PO	DSSESSIO	N &_	SIGN/ PRINT	NAMES	1	<u> </u>	SF	PECIAL INSTR	RUCTIONS		
RELINQUISHE	D BY/REMO	/5:30 VED.EROM \ DATE/TIME	RECEIVED BY/S	TOPED IN		/S DATE/T				ize (Dry Sieve) - D42	2; Saturated Hydraulic
KOM D.H	4-1155	11-11-		is te Ecid	an sele (11-11-04		onductivity; P	article Density - D85	4; Calcium Carbonate	e Content;
RELINDUISHE	BY PEN	PER TON 12 ATELTIME	APP VERY	REP Y	South	אורגערוני	1950				
RELET OF SHE	L T	MEDISEAN DATESTINE	RECEIVED BY	TORED IN	ACU W	DATE/T	THE T				
MHIAM	MINI.	LEAN (YUV VIII HOT OHIC	HOD	77		DATE;					
RELINQUISHE			RECEIVED BY/S		., 1.	DATE/T	ME				
RELINQUISHER			REDEIVED BY	TORED IN		8/04 10 DATE/T					4
And	And Dome 11/12/24 3:30		تع ا	775	11/2	2/04					(†, , , , , , , , , , , , , , , , , , ,
RELINQUISHED	BY/REMO	VED FROM / DATE/TIME	RECEIVED BY/S	TORED IN		DATE/T	ME				† †
RELINQUISHEE	RELINQUISHED BY/REMOVED FROM DATE/TIME			TORED IN		DATE/TO	ME				Ţ.
								<u> </u>			
LABORATO	R.T	CEIVED BY	1 //	C11 A .				nle .		11/0-	DATE/TIME
SECTION		Ollali	er_	SHAW (SNUIN	مهدي	WEAR	<u> </u>	-	11/23	5/04 @ 1000
FINAL SAME	TLE	SPOSAL METHOD					DIS	SPOSED BY			DATE/TIME
DISPOSITI											

SDG# H2843
Eberline Srvces

PAGE 1

CHAIN OF CUSTODY ORD # R4-11-172

11/19/04 10:22:55 WORK ID: SAF# F03-018 SDG H2843

					••	
RCVD: 11/18/04 DUE: 01/02/05				KEEP:	01/02/06	DISP: S
DASH SAMPLE IDENTIFICATION	STORED	TESTS				
01A-S B19ND3	SHAW	DISPOS	E331S E333	3S E335S	E342S	
	========				========	
. RELEASED BY DAT	no .	TRANSFERRED TO	DATE	-10°20	TIMED DV 4	D3.000
1102	→	Shaw	11/22/04	<u> </u>	RIVED BY	<u>DATE</u> _/1-23/4
Just Amen 11/20	 '		-1100/3	The	all—	- 11-63/44
			-			_
	<u>_</u>					
						_